


BARBED SELVEDGE DETAIL

Chain wire shall be tightened and securely fastened to posts at not more than 400 and tension wires at not more than 500 intervals with 2.5Ø galvanised tie wire or approved clips.

GENERAL ARRANGEMENT

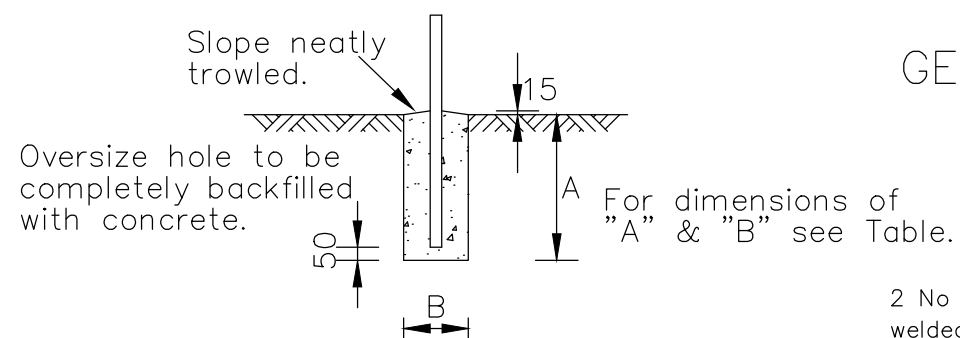


STANDARD POST HOLE

POST, HOLE DIMENSION TABLE

Posts	A	B
Intermediate	600	250Ø
Corner, end or strainer	750	250Ø
Gate	1000	300Ø

2 No 100 X 100 X 6 gussets welded to both pipes with 3 min fillet weld.

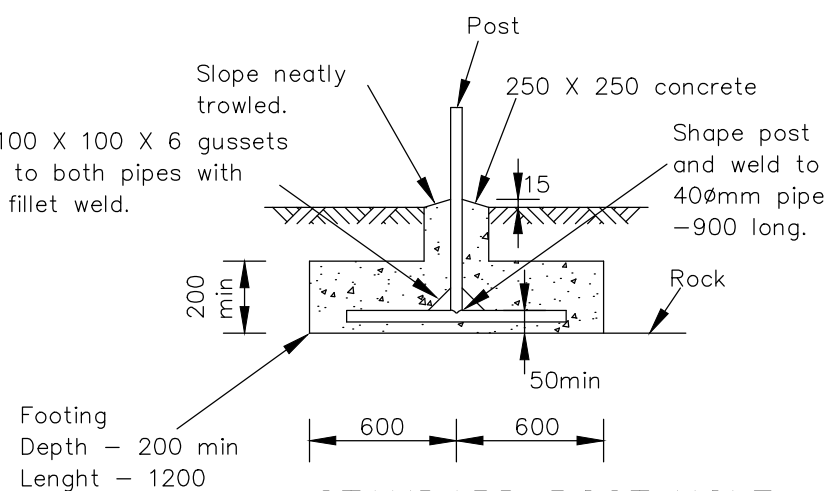

STANDARD POST HOLE POST FOOTING WHEN ROCK IS NEAR SURFACE

NOTES

- Where specified a 300 wide X 50 thick concrete strip shall be laid after erection of the posts along line of fence for maintenance purposes.
- All pipe diametres are nominal bore.
- All fence fittings shall be approved standard fittings. Refer AS 1725-2003.
- Brace — 10Ø galvanised MS rod and turnbuckle or 4 No cabled 4Ø wires.
- Electrical insulation details for fences in the vicinity of electricity transmission lines and towers.

NOT TO SCALE

SCALE @ A3

REV	DATE	BY	APP	REVISION DESCRIPTION
B	08/02/2022	DS	AO	REVIEW AND REISSUE
A	08/01/2007			ORIGINAL ISSUE



PROJECT:
**MOYNE SHIRE COUNCIL
STANDARD DETAILS**

PROJECT No.:

DWG NO : **MSC-036**

TITLE :
FENCE - CHAIN WIRE MESH

REV: **B**