


BARBED SELVEDGE DETAIL

Chain wire shall be tightened and securely fastened to posts at not more than 400 and tension wires at not more than 500 intervals with 2.5Ø galvanised tie wire or approved clips.

GENERAL ARRANGEMENT

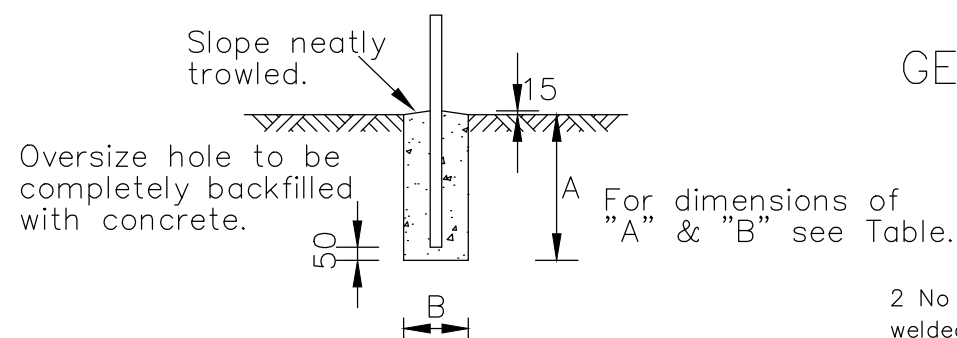


STANDARD POST HOLE

POST, HOLE DIMENSION TABLE

Posts	A	B
Intermediate	600	250Ø
Corner, end or strainer	750	250Ø
Gate	1000	300Ø

2 No 100 X 100 X 6 gussets welded to both pipes with 3 min fillet weld.

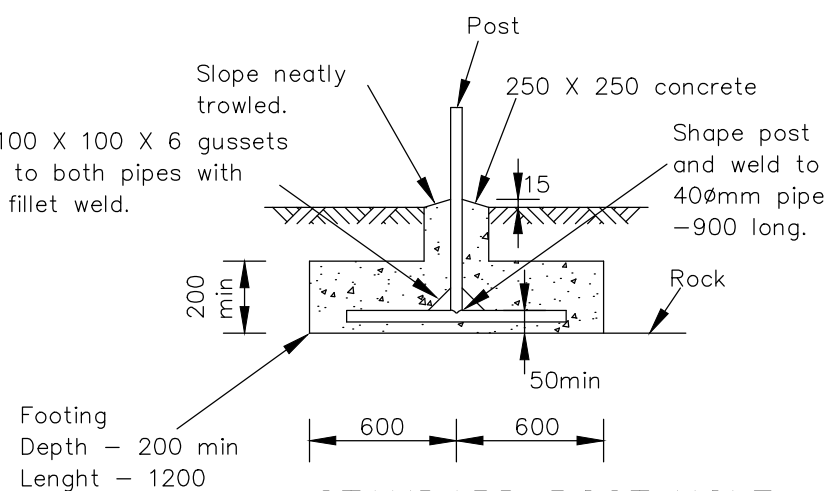

STANDARD POST HOLE POST FOOTING WHEN ROCK IS NEAR SURFACE

NOTES

- Where specified a 300 wide X 50 thick concrete strip shall be laid after erection of the posts along line of fence for maintenance purposes.
- All pipe diametres are nominal bore.
- All fence fittings shall be approved standard fittings. Refer AS 1725-2003.
- Brace — 10Ø galvanised MS rod and turnbuckle or 4 No cabled 4Ø wires.
- Electrical insulation details for fences in the vicinity of electricity transmission lines and towers.

NOT TO SCALE

SCALE @ A3

REV	DATE	BY	APP	REVISION DESCRIPTION
B	08/02/2022	DS	AO	REVIEW AND REISSUE
A	08/01/2007			ORIGINAL ISSUE




PROJECT:
**MOYNE SHIRE COUNCIL
STANDARD DETAILS**

PROJECT No.:

DWG NO : **MSC-036**

TITLE :
FENCE - CHAIN WIRE MESH

REV: **B**

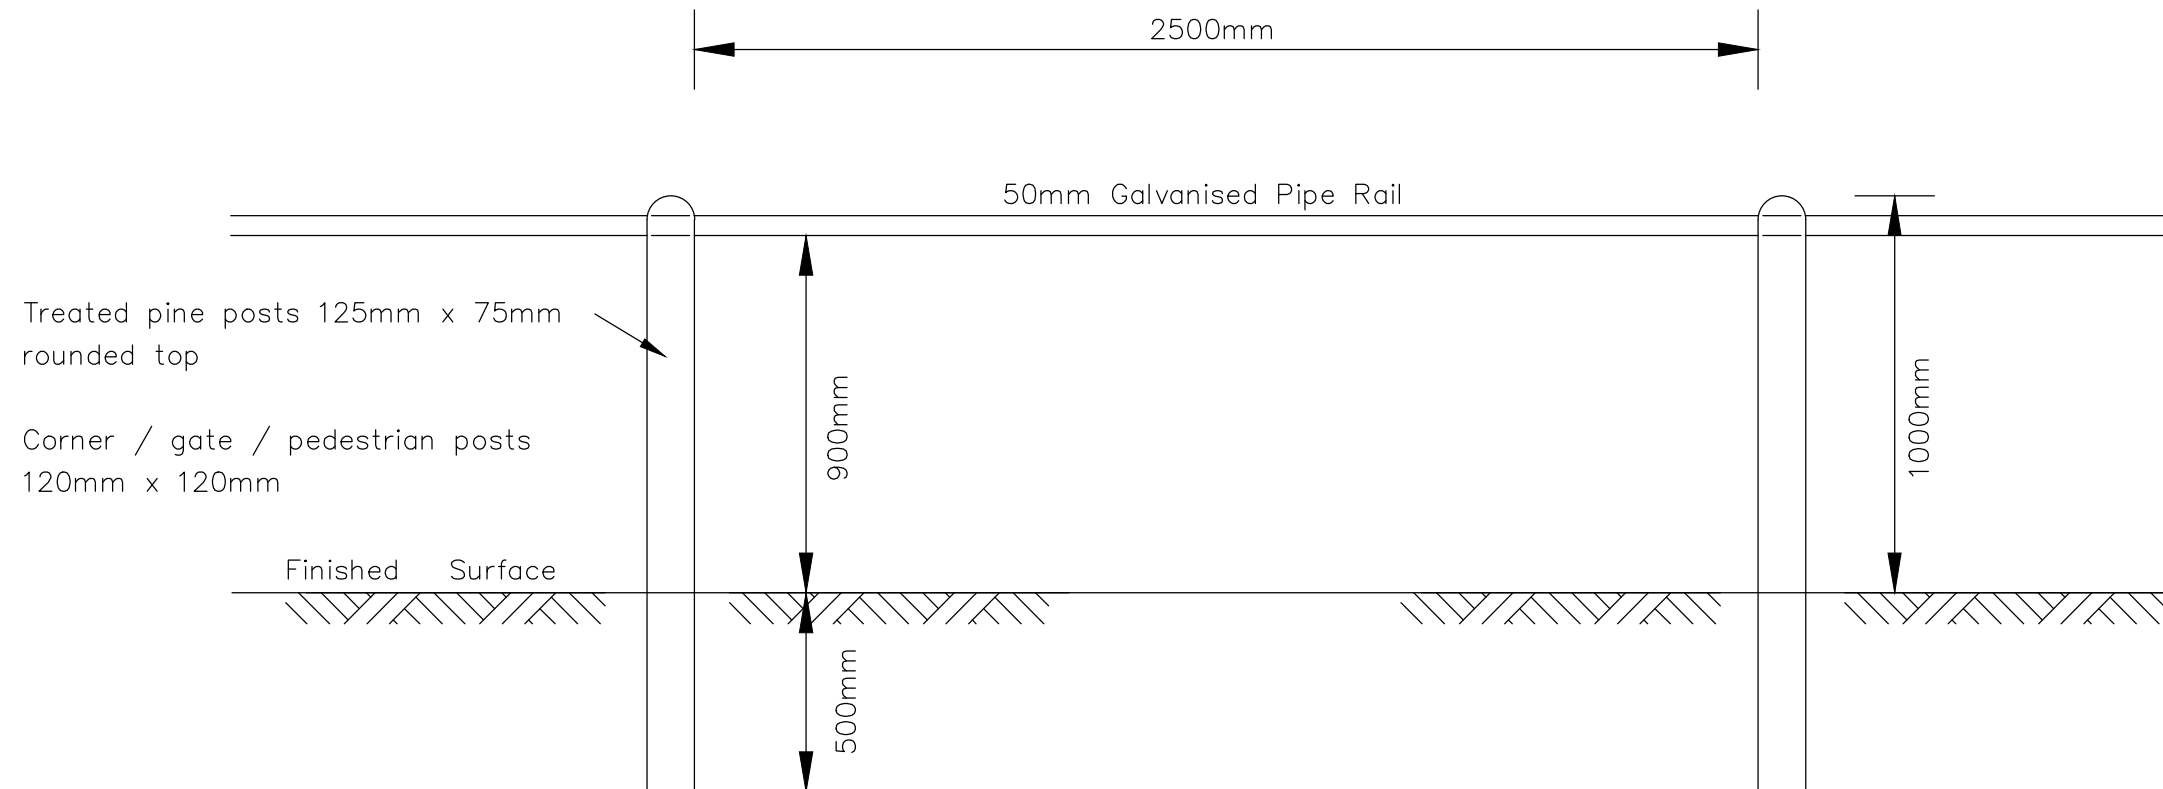

NOTES

This type of fence must be installed at an offset greater than 3 metres from the edge of any trafficable road.

NOT TO SCALE

SCALE @ A3

REV	DATE	BY	APP	REVISION DESCRIPTION
B	08/02/2022	DS	AO	REVIEW AND REISSUE
A	08/01/2007			ORIGINAL ISSUE



PROJECT:
**MOYNE SHIRE COUNCIL
STANDARD DETAILS**


PROJECT No.:

DWG NO : **MSC-037**


TITLE :
FENCE - POST & WIRE

REV: **B**

LOW HEIGHT GATE

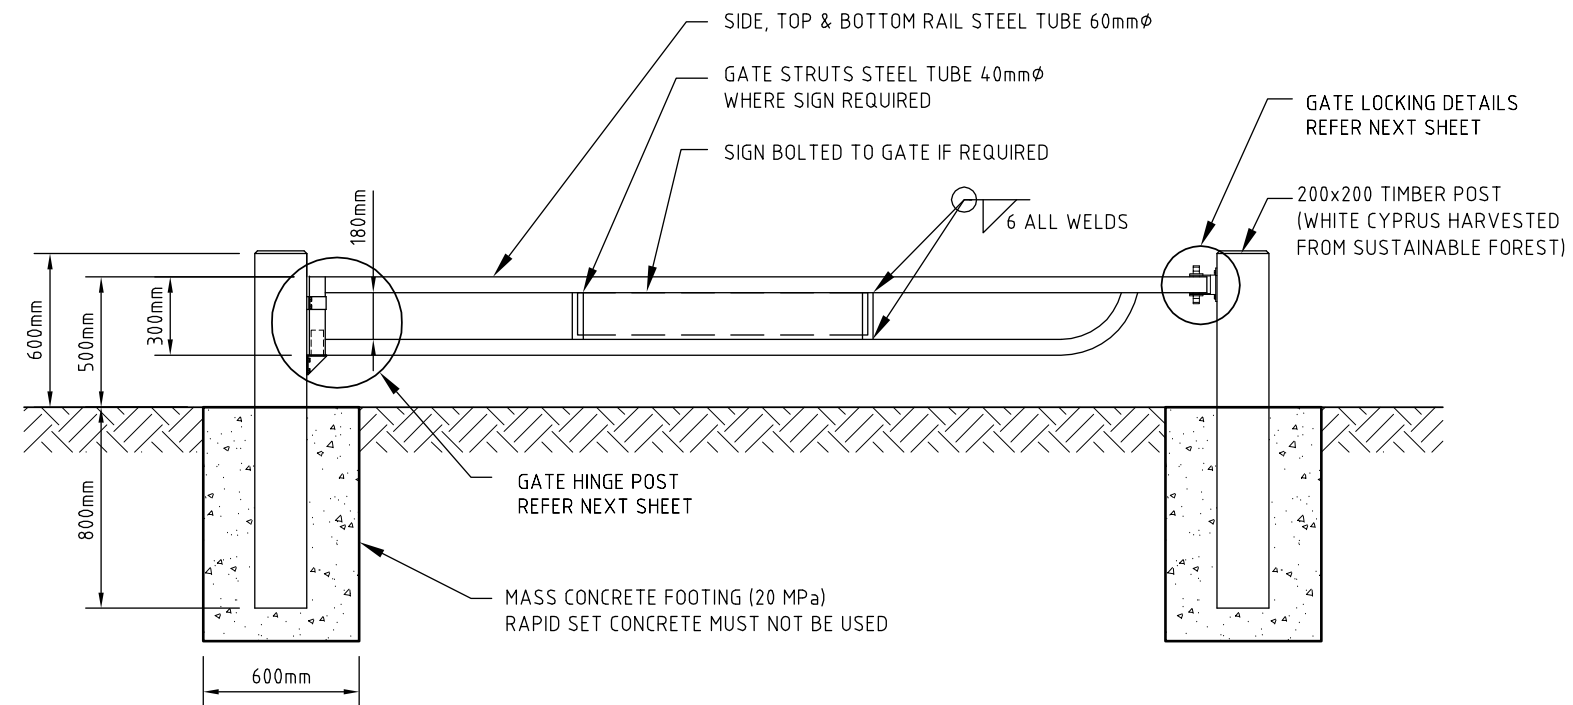

FULL HEIGHT GATE

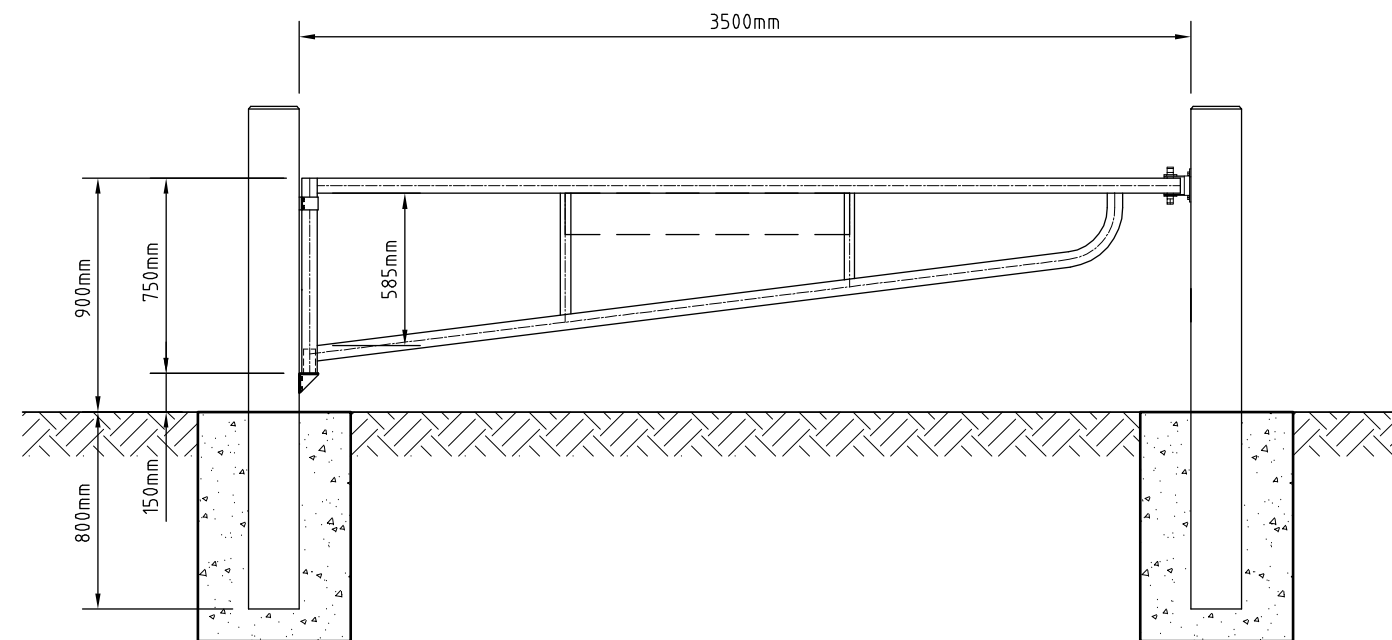

NOT TO SCALE

SCALE @ A3

B	08/02/2022	DS	AO	REVIEW AND REISSUE					
A	08/01/2007			ORIGINAL ISSUE					
REV	DATE	BY	APP	REVISION DESCRIPTION	REV	DATE	BY	APP	REVISION DESCRIPTION





PROJECT:
**MOYNE SHIRE COUNCIL
 STANDARD DETAILS**

PROJECT No.:



DWG NO :	MSC-039
----------	---------

TITLE :
SWING GATE

EV: **B**

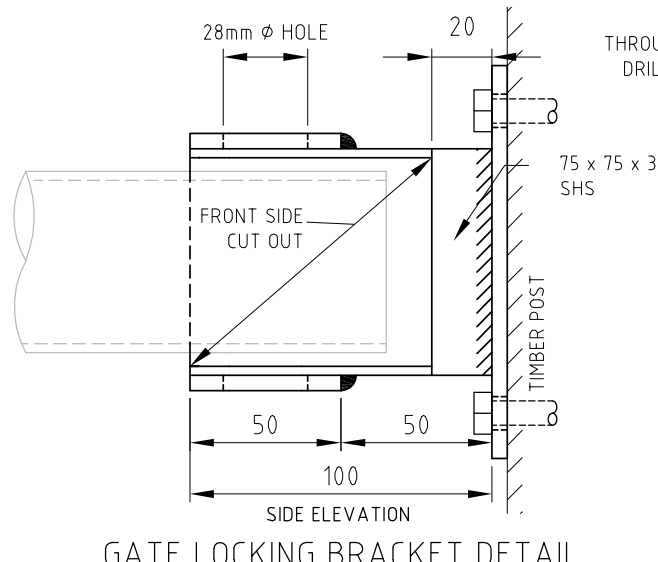
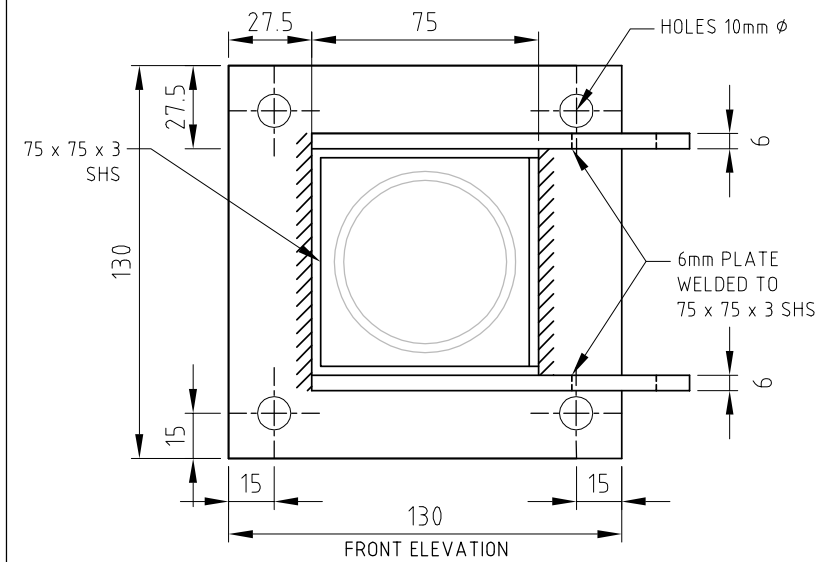


GATE LOCKING BRACKET DETAIL


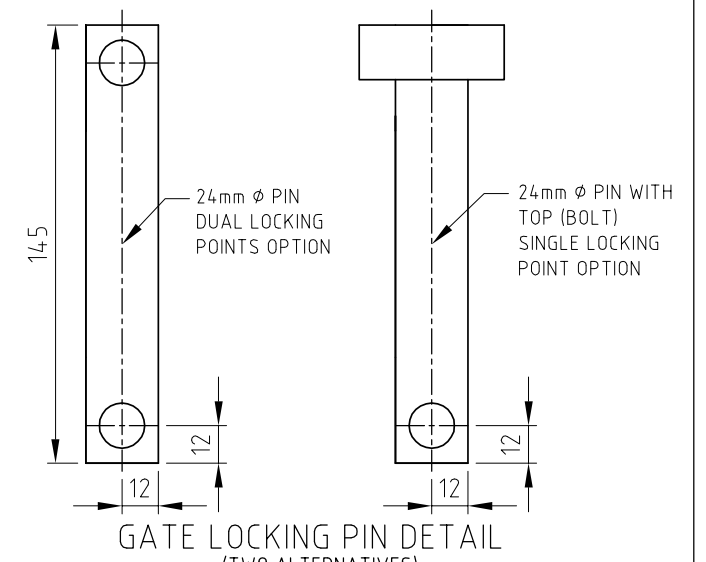
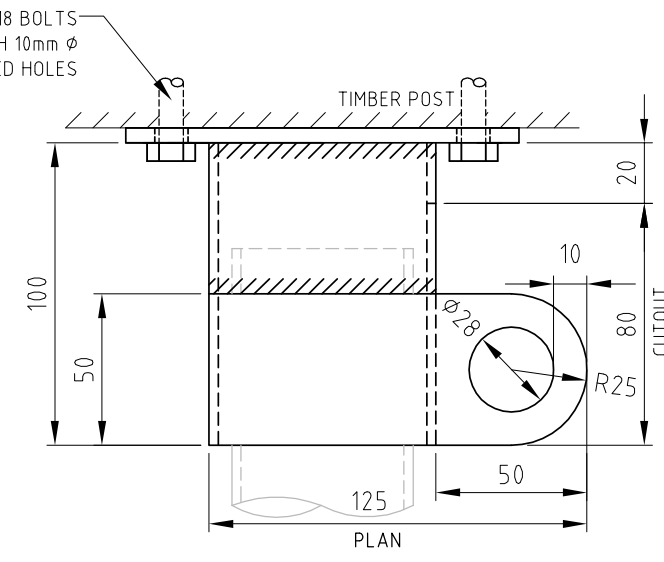


NOTES:



- ALL BRACKETS AND FITTINGS TO BE GALVANISED
- ALL WELDS TO BE 5mm FW WHERE SHOWN

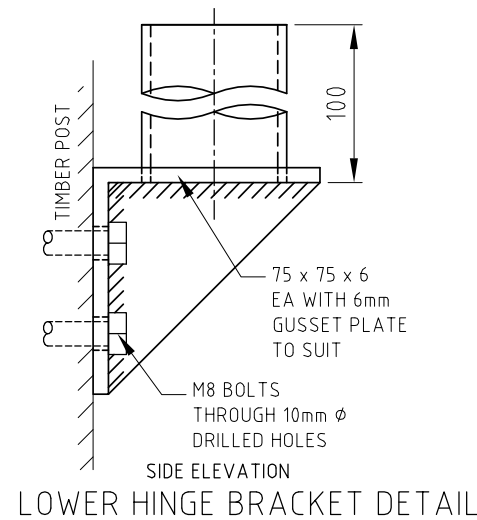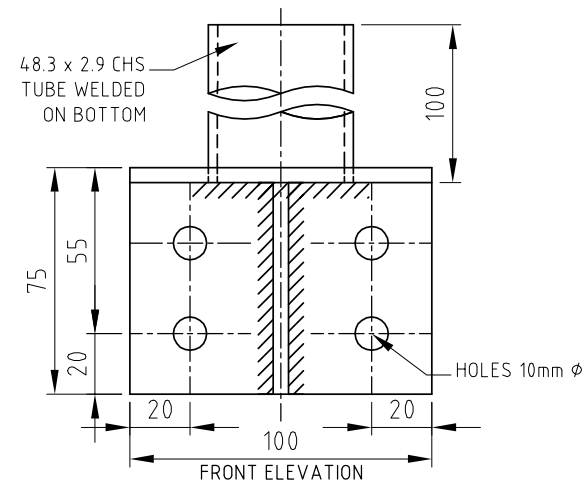

LOWER HINGE BRACKET DETAIL

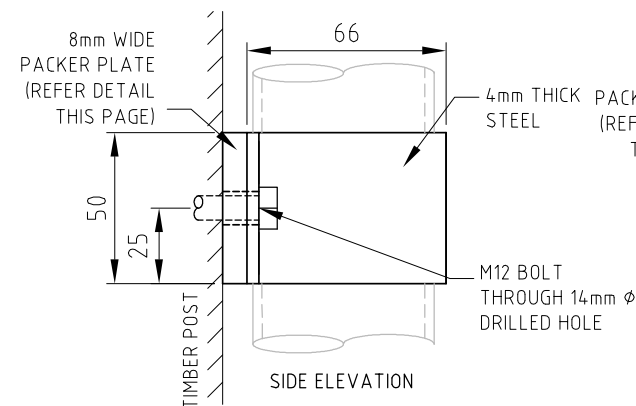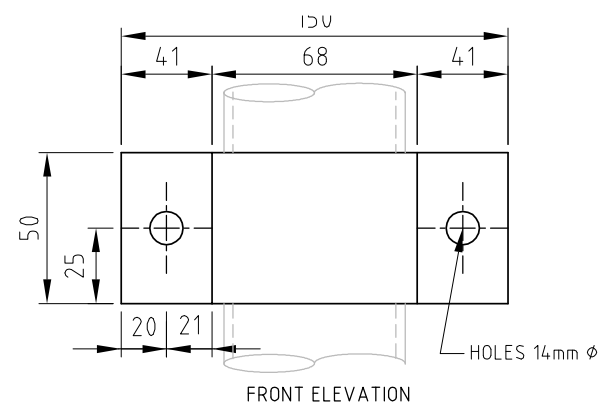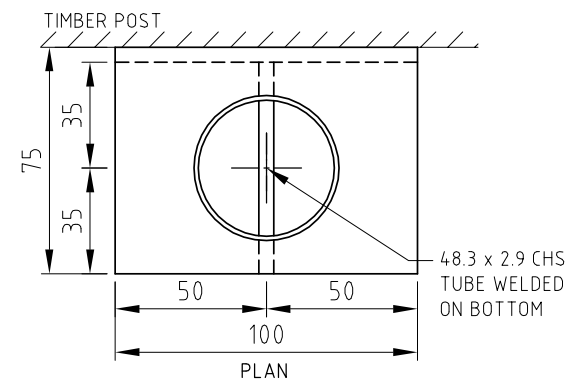

TOP HINGE BRACKET DETAIL

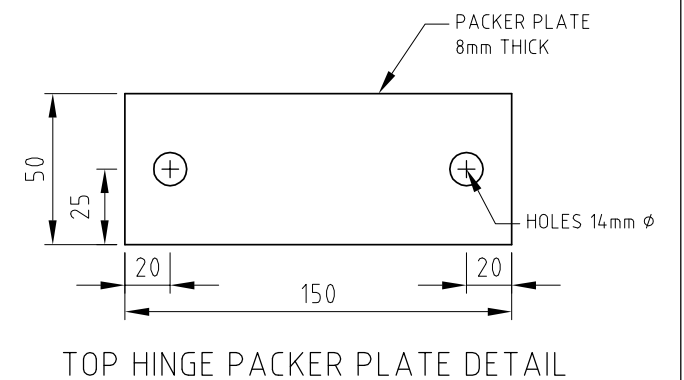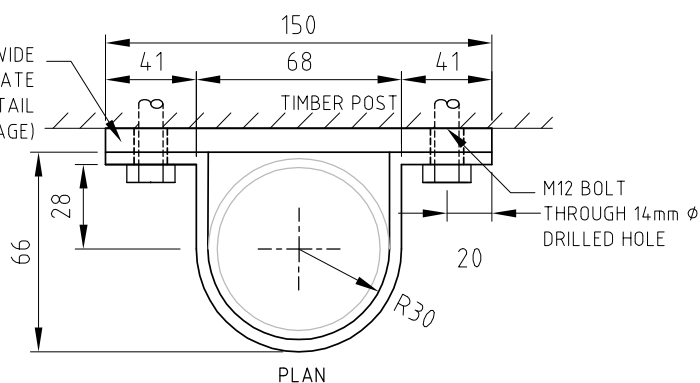

NOT TO SCALE

SCALE @ A3

REV	DATE	BY	APP	REVISION DESCRIPTION
B	08/02/2022	DS	AO	REVIEW AND REISSUE
A	08/01/2007			ORIGINAL ISSUE





PROJECT: MOYNÉ SHIRE COUNCIL STANDARD DETAILS

DWG NO: MSC-039

TITLE: SWING GATE

REV: B

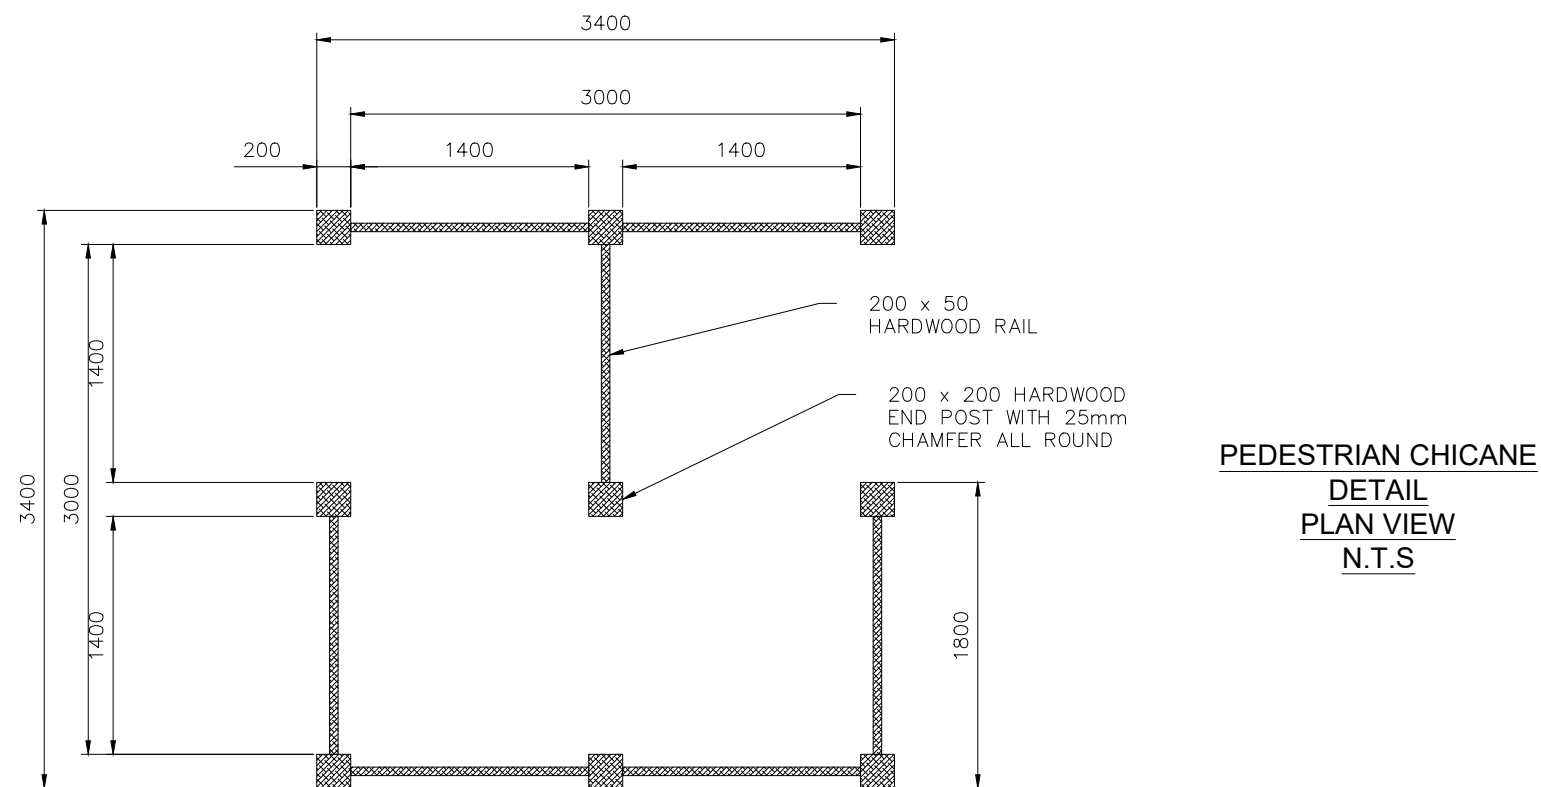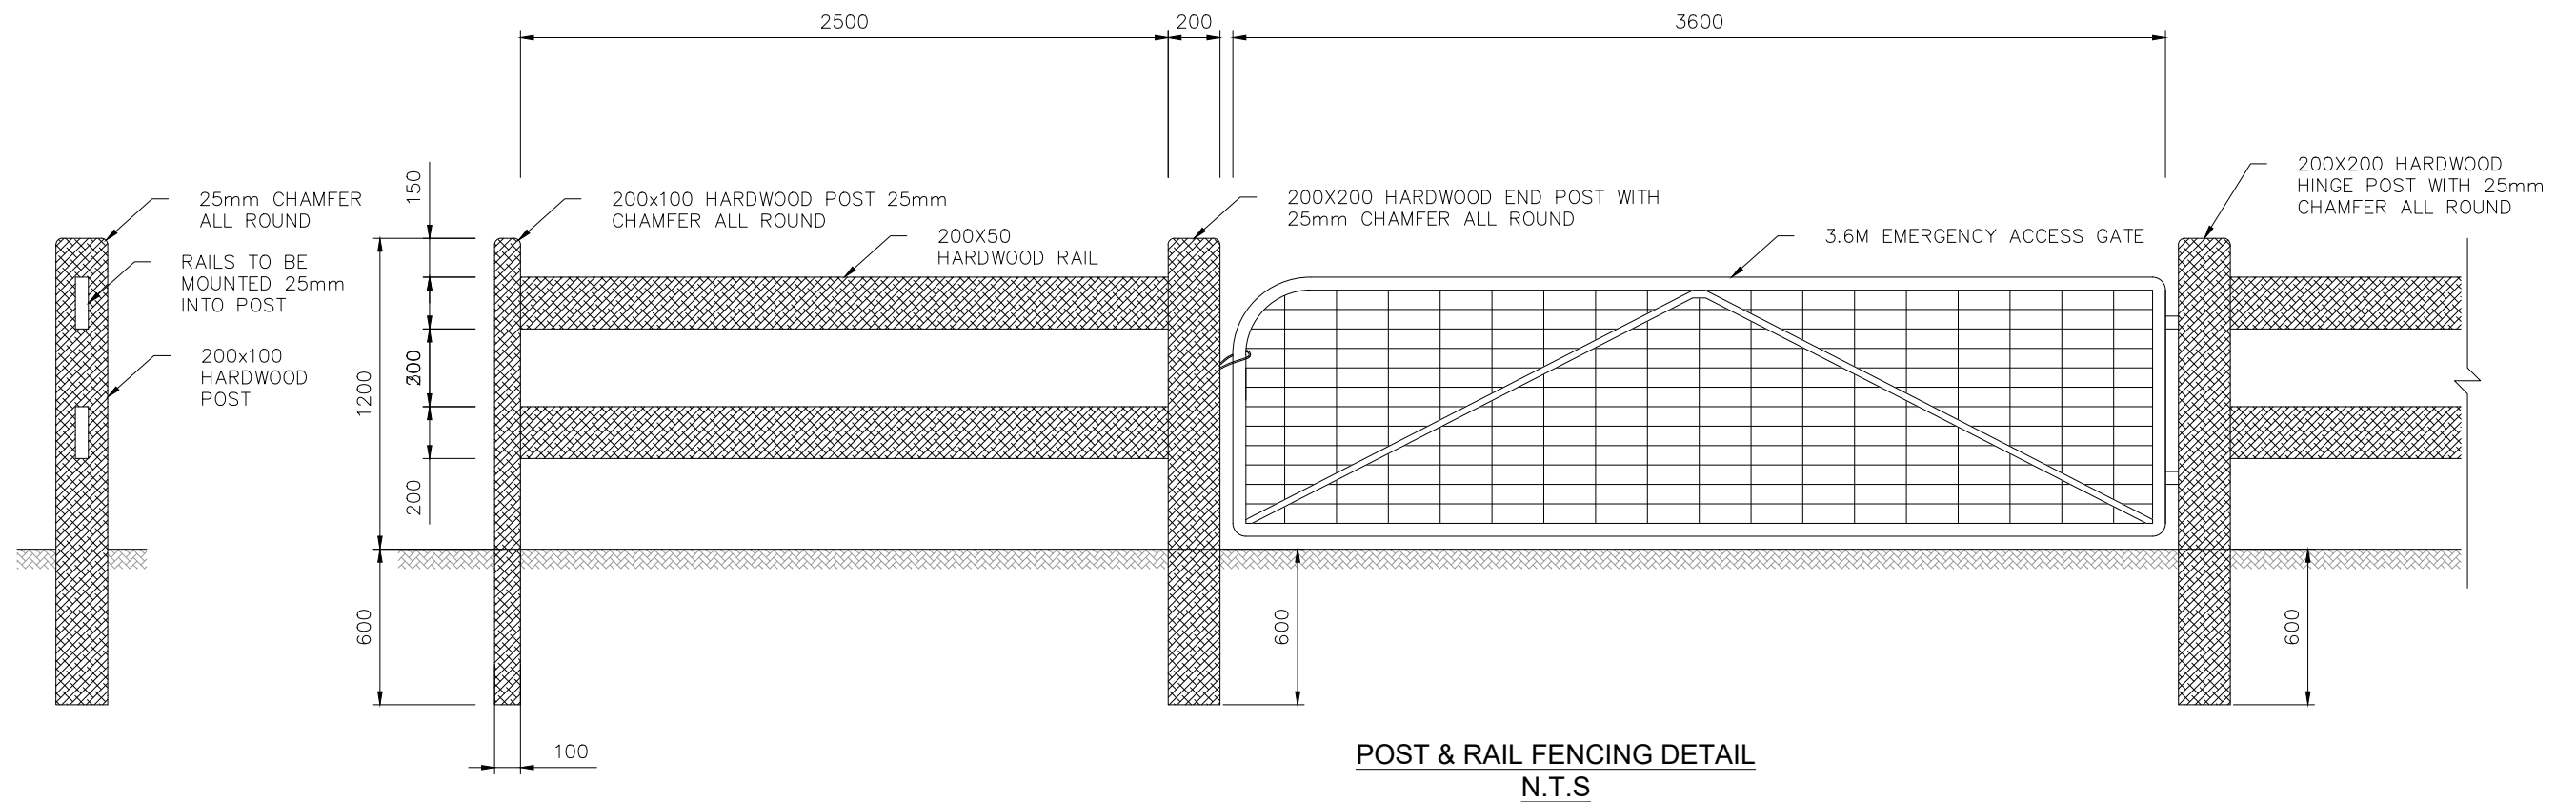

NOT TO SCALE

SCALE @ A3

REV	DATE	BY	APP	REVISION DESCRIPTION
B	08/02/2022	DS	AO	REVIEW AND REISSUE
A	08/01/2007			ORIGINAL ISSUE




PROJECT:
MOYNE SHIRE COUNCIL
STANDARD DETAILS

PROJECT No.:

DWG NO : **MSC-041**

TITLE :
FENCES - WALKING AND CYCLING PATHS

REV: **B**

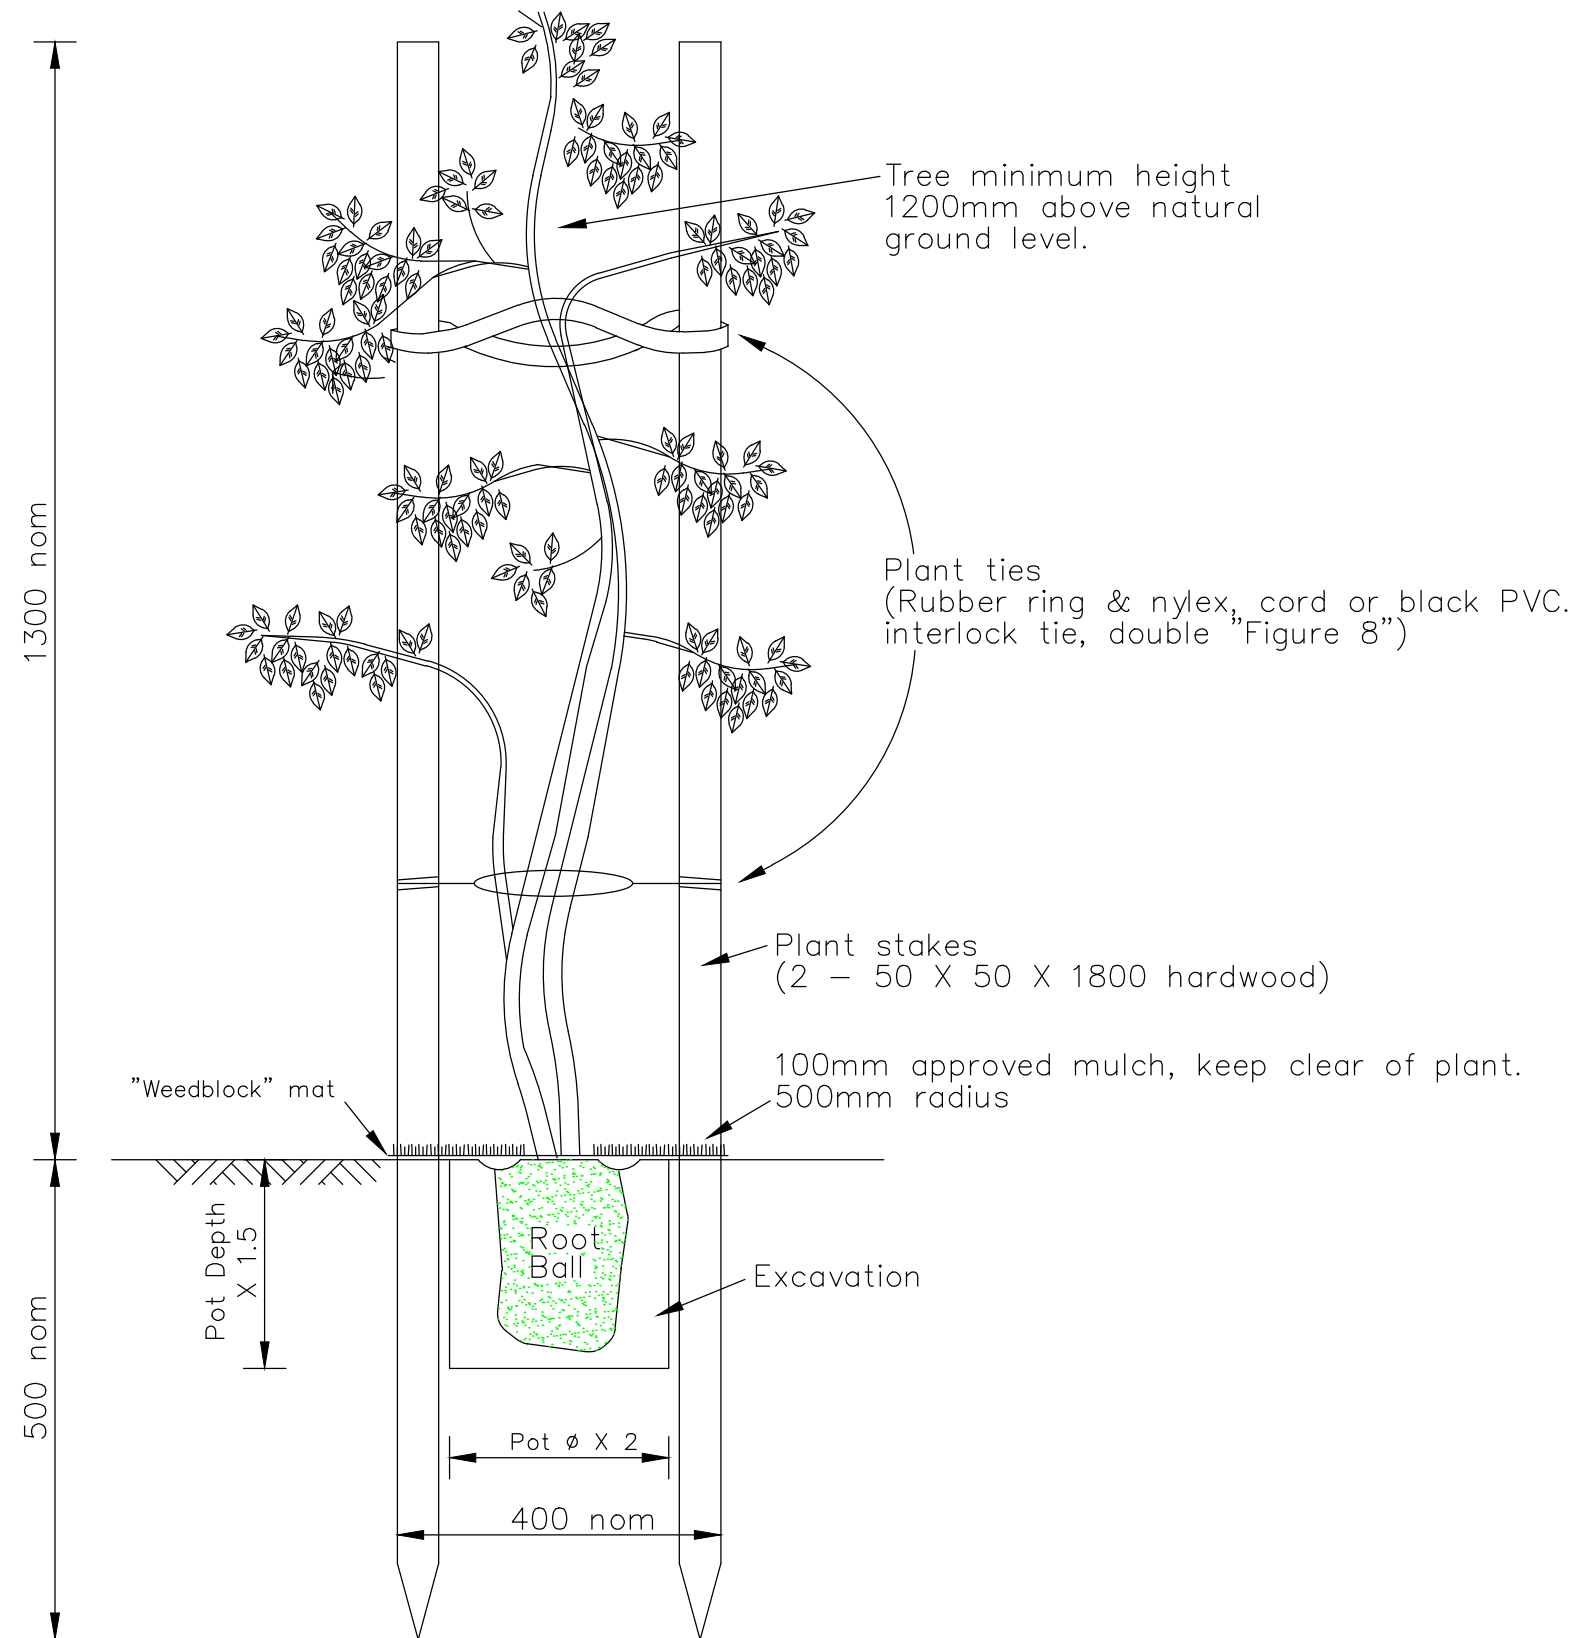

NOT TO SCALE

SCALE @ A3

REV	DATE	BY	APP	REVISION DESCRIPTION
B	08/02/2022	DS	AO	REVIEW AND REISSUE
A	08/01/2007			ORIGINAL ISSUE




PROJECT:
**MOYNÉ SHIRE COUNCIL
STANDARD DETAILS**

PROJECT No.:

DWG NO : **MSC-043**

TITLE :
TREE PLANTING AND STAKING

REV: **B**



	PROJECT: MOYNE SHIRE COUNCIL STANDARD DETAILS
	PROJECT No.:

SCALE @ A3

PROJECT:

MOYNE SHIRE COUNCIL STANDARD DETAILS


[illegible]

1. ALL DIMENSIONS IN MILLIMETRES UNLESS OTHERWISE INDICATED.
2. SIGN AND POST SHALL MAINTAIN A DESIRABLE MINIMUM DISTANCE FROM THE EDGE OF ROAD AS FOLLOW
 - 2.1. BARRIER KERB 750mm
 - 2.1. SEMI - MOUNTABLE 750mm
 - 2.1. NO KERB 1000mm
3. SIGN TO BE MANUFACTURED IN ACCORDANCE WITH AS 1744:2015
 - 3.1. SIGN BLADE TEXT AND BACKGROUND TO BE COLOURED AS PER SIGN COLOURS TABLE BELOW.
4. ALL LETTERS AND COLOURED BACKGROUNDS MUST BE RETROFLECTIVE AND MEET THE REQUIREMENTS OF CLASS 1 MATERIALS PER AS/NZS 1906.1
5. MINIMUM SIGN LENGTH 500mm
6. MAXIMUM SIGN LENGTH 1200mm
7. ALL LETTERING SHALL BE SERIES D AS PER AS 1744:2015. WHERE AN OVER LENGTH SIGN WOULD RESULT SERIES C MAY BE USED
8. ABBREVIATIONS MUST BE AS PER AS 1742:2017
9. A MINIMUM 20mm SPACING SHALL BE MADE BETWEEN THE STREET NAME AND STREET TYPE
10. NO THROUGH ROAD SIGNS SHALL BE A SUPPLEMENTARY BLACK ON YELLOW SIGN AS PER AS 1742.5:2017
11. SIGN MOUNTING HEIGHT SHALL BE BETWEEN 2.50 - 3.00m ABOVE GROUND LEVEL AS PER AS 1742.5:2017

12. STREET NAME LETTER HEIGHT:	100mm
13. STREET TYPE ABBREVIATION HEIGHT:	50mm

SIGN COLOURS TABLE			
TOWN	TEXT COLOUR	BACKGROUND COLOUR	FONT
CARAMUT	BLACK	WHITE	SERIES D AS 1744
CHATSWORTH	BLACK	WHITE	SERIES D AS 1744
ELLERSLIE	BLACK	WHITE	SERIES D AS 1744
FRAMLINGHAM	BLACK	WHITE	SERIES D AS 1744
GARVOC	BLACK	WHITE	SERIES D AS 1744
HAWKESDALE	BLACK	WHITE	SERIES D AS 1744
HEXHAM	BLACK	WHITE	SERIES D AS 1744
KIRKSTALL	BLACK	WHITE	SERIES D AS 1744
KOROIT	WHITE	GREEN	SERIES D AS 1744
MACARTHUR	BLACK	WHITE	SERIES D AS 1744
MORTLAKE	BLACK	WHITE	SERIES D AS 1744
ORFORD	BLACK	WHITE	SERIES D AS 1744
PANMURE	BLACK	WHITE	SERIES D AS 1744
PETERBOROUGH	BLACK	WHITE	SERIES D AS 1744
PORT FAIRY	WHITE	INDIAN RED	SERIES D AS 1744
PURNIM	BLACK	WHITE	SERIES D AS 1744
WINSLOW	BLACK	WHITE	SERIES D AS 1744
WOOLSTHORPE	BLACK	WHITE	SERIES D AS 1744
WOORNDOO	BLACK	WHITE	SERIES D AS 1744
YAMBUK	BLACK	WHITE	SERIES D AS 1744

SCALE @ A3

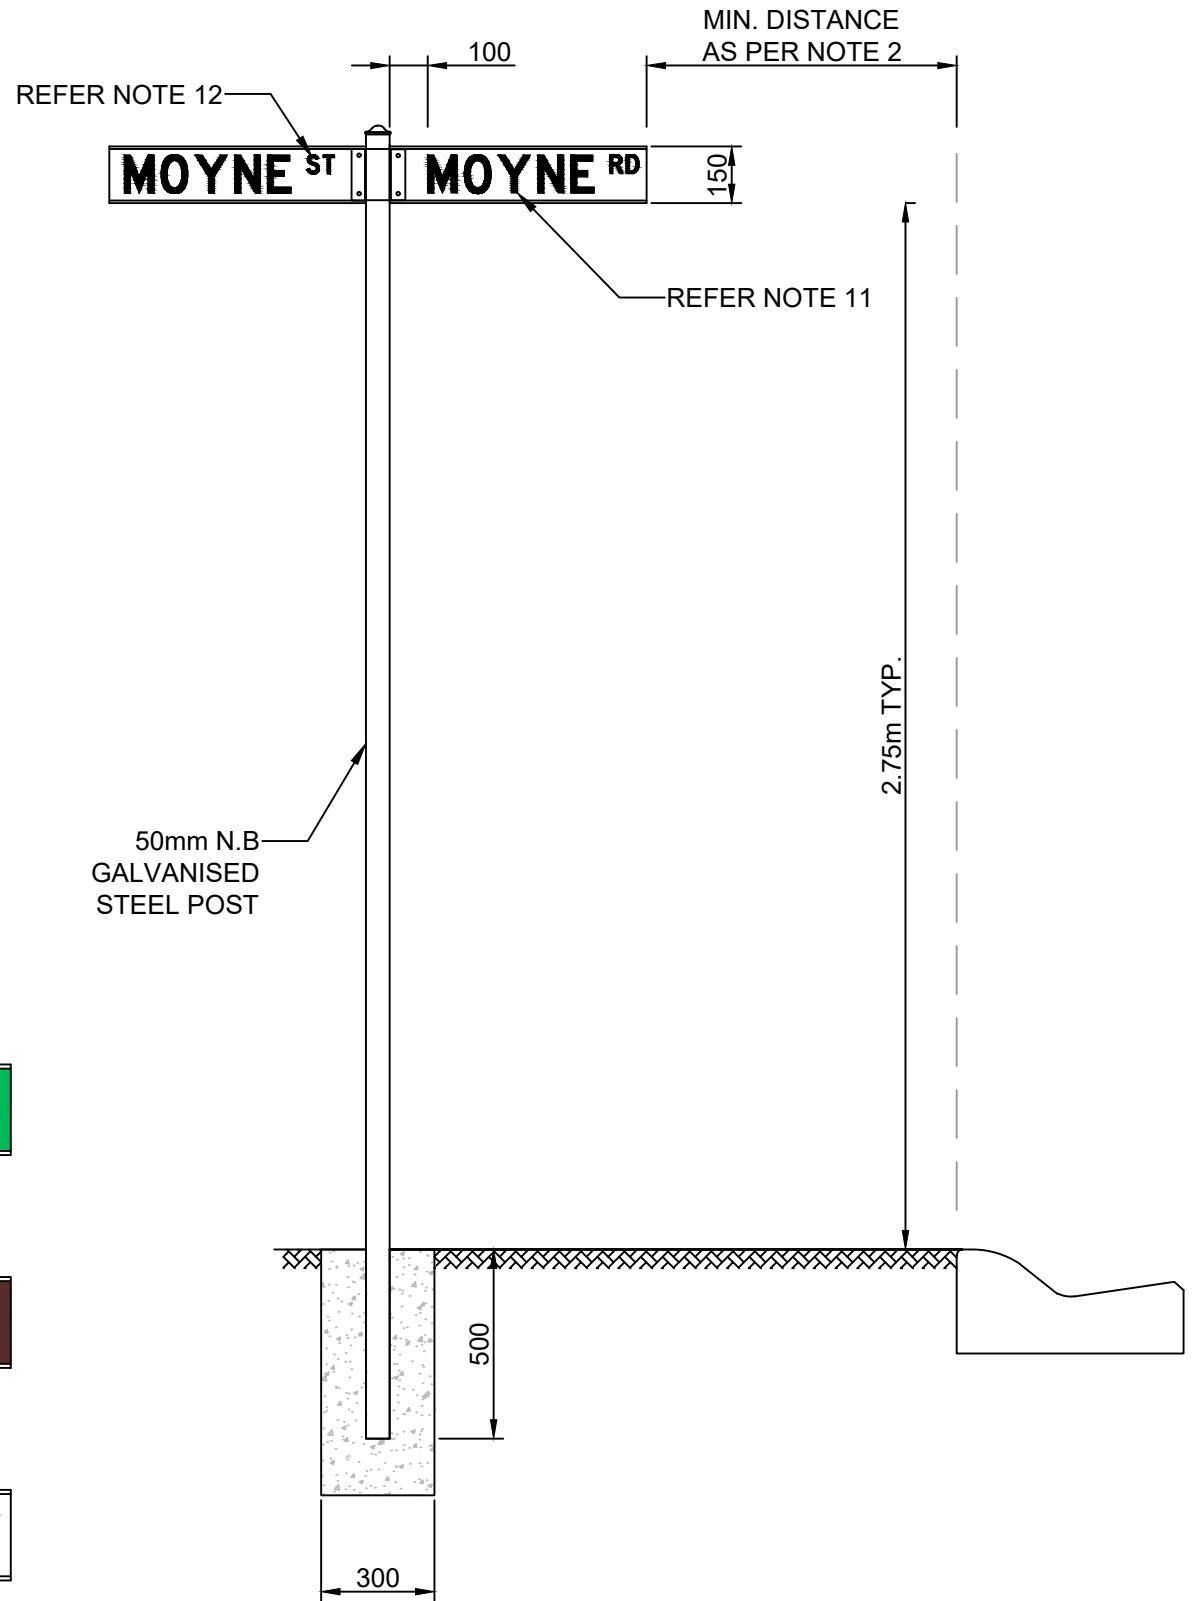

MOYNE RD


WHITE ON GREEN
KOROIT ONLY

MOYNE RD


WHITE ON INDIAN RED
PORT FAIRY ONLY

MOYNE RD


BLACK ON WHITE
ALL OTHER AREAS

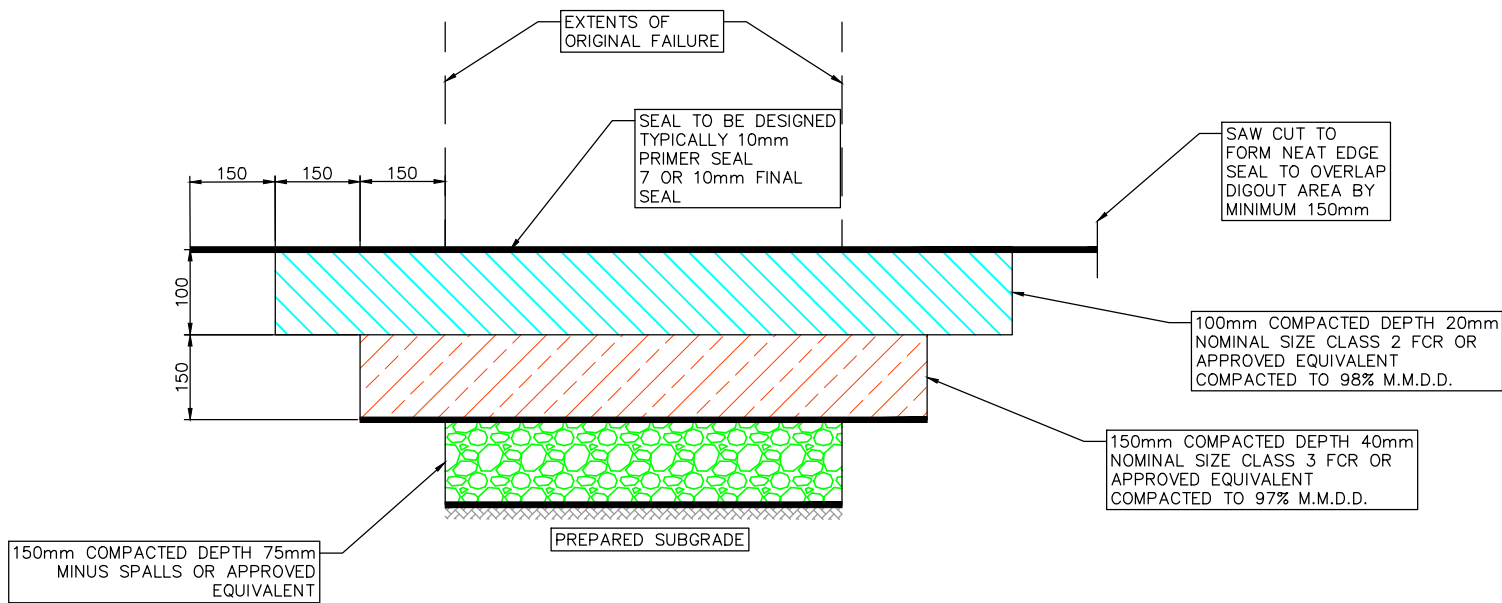

TYPICAL DETAIL
MAINTENANCE DIGOUTS FOR ACCESS ROADS
N.T.S

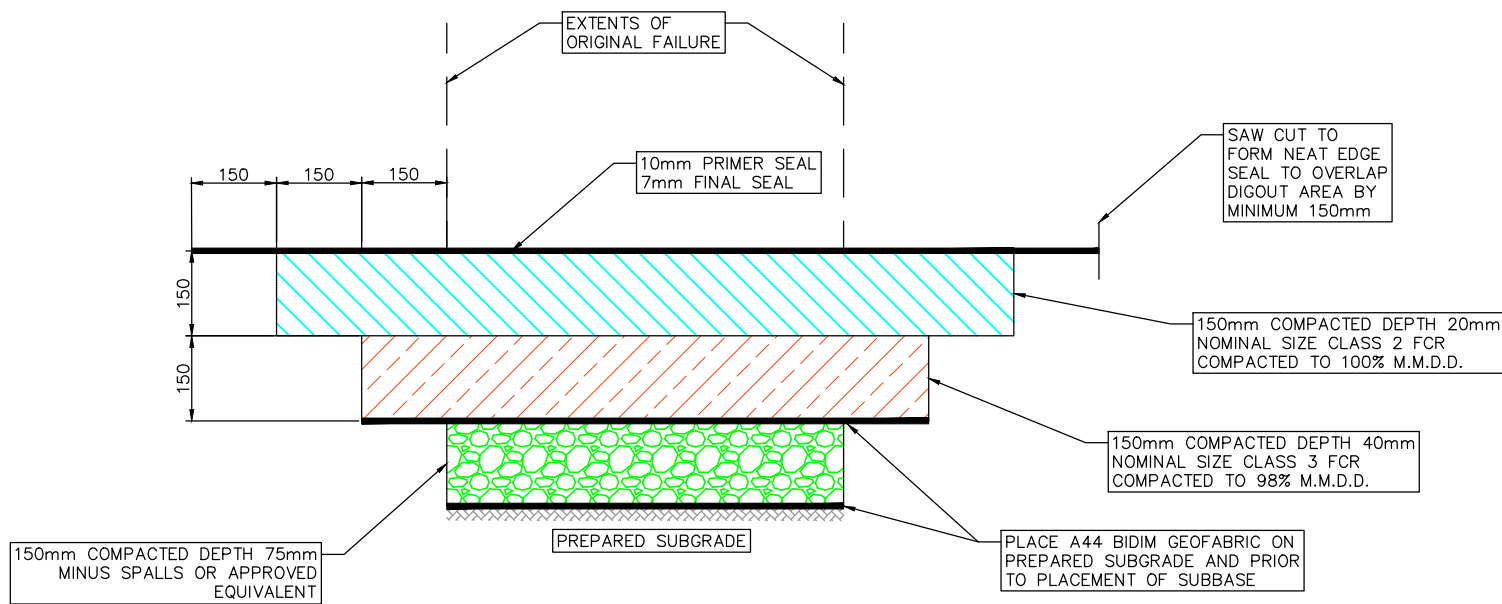

TYPICAL DETAIL
MAINTENANCE DIGOUTS FOR LINK AND
COLLECTOR ROADS
N.T.S

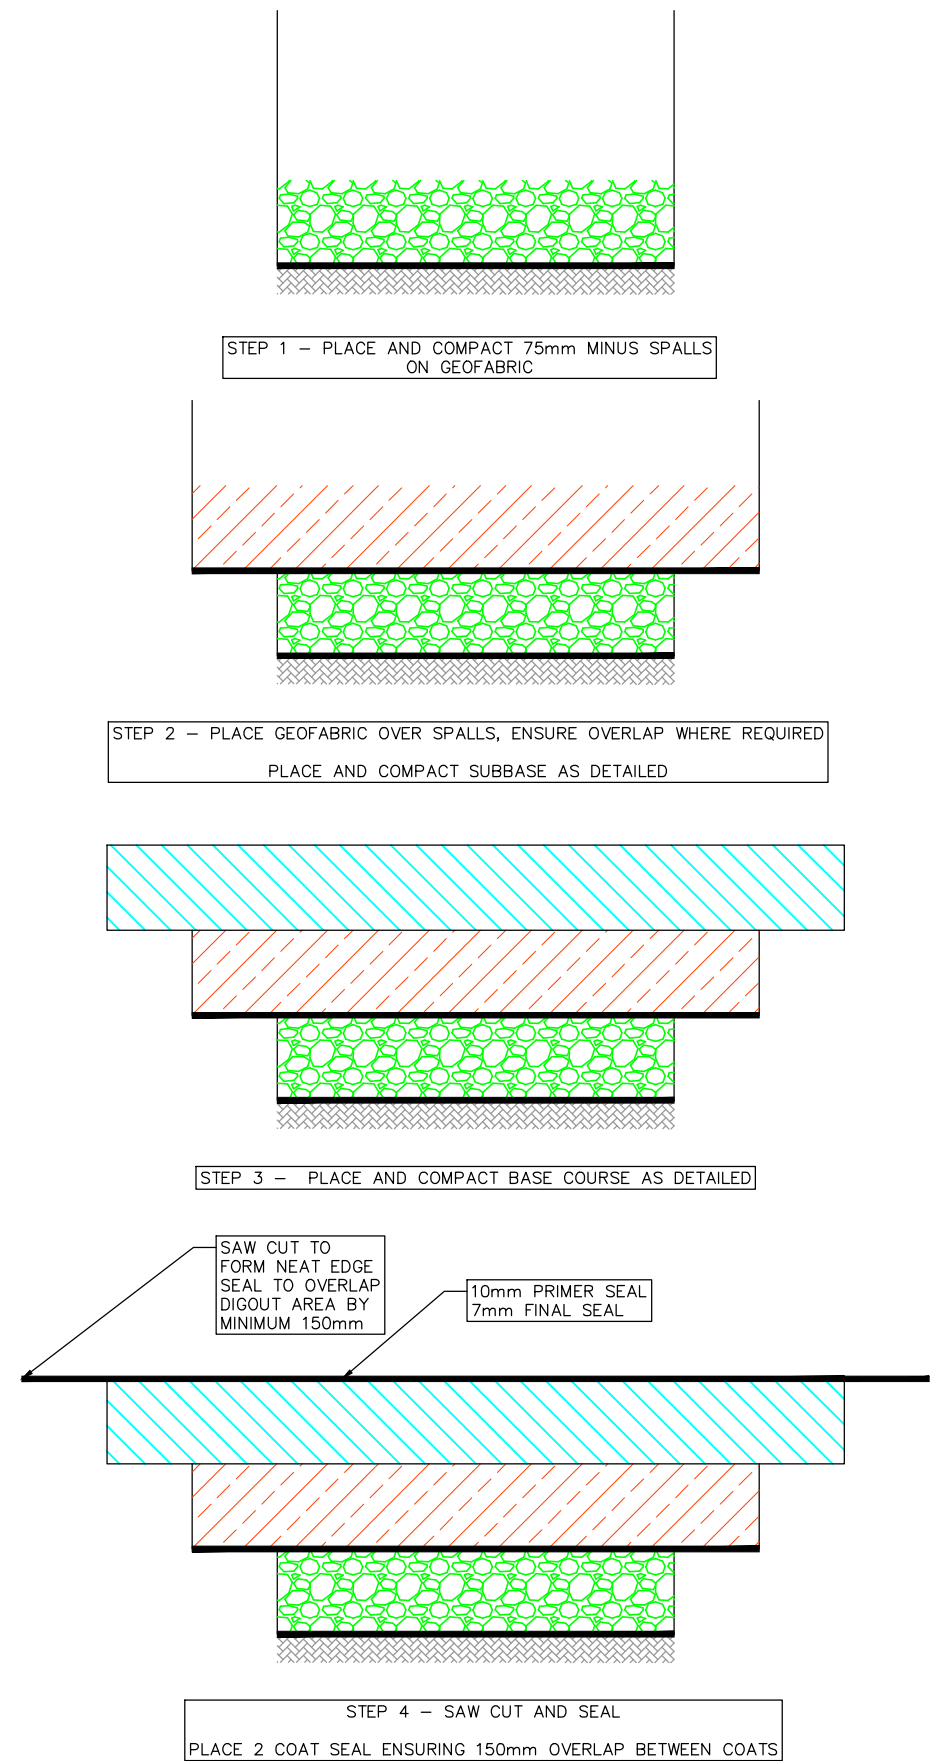

NOT TO SCALE

SCALE @ A3

REV	DATE	BY	APP	REVISION DESCRIPTION	REV	DATE	BY	APP	REVISION DESCRIPTION
A	08/02/2022	DS	AO	APPROVED FOR USE					



PROJECT:
**MOYNE SHIRE COUNCIL
STANDARD DETAILS**

PROJECT No.:

DWG NO : **MSC-048**

TITLE :
**TYPICAL DETAIL -
MAINTENANCE DIGOUTS**

REV: **A**

